
SAN WU RUBBER MFG. CO. LTD.



綠色輸送帶

Green Conveyor Belt



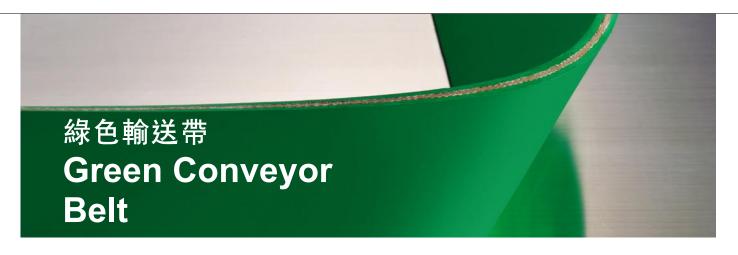


Green conveyor belts are widely used in a variety of light purpose conveyor systems: Footwear, packaging and electronic parts conveyor production system. The special cover is designed to prevent the transported materials from being scraped and contaminated by the color of the belt. The non-reflective green surface cover can reduce eye fatigue. GB100 green conveyor belts use a bare back rubber cover design and a special fabric carcass to lower friction between other conveyor components and allow the use of small diameter pulley conveyor systems.

級色輸送帶廣泛地應用於各種輕便型輸送系統,例如:製鞋,包裝和電子工廠的輸送生產線,採用特殊設計的面膠材質,於輸送時不易發生因摩擦導致輸送物外觀被輸送帶的顏色所污染,同時綠色不反光的面膠也可減輕工作人員眼睛的疲勞。GB100型綠色輸送帶則採用無背面膠設計並使用特殊的布層心體,大幅降低輸送帶與其他輸送元件的摩擦,特別適用於輪徑較小的輸送系統。


SPECIFICATIONS AND TECHNICAL DATA

GC100 2 PLY COVER 1.6mm X COVER 1.6mm




OAG.	5.2mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 °c
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	75mm

GC105 2 PLY COVER 0.8mm X COVER 0.8mm



OAG.	3.6mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 °c
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	75mm

GB100 2 PLY COVER 0.6mmX BARE



OAG.	2.6mm
COMPOUND	SBR / NR
FABRIC	Synthetic
AMBIENT TEMP.	0 ~ 100 °c
WORKING TENSION	16 kg / cm
MIN. PULLEY Dia.	50mm

SAN WU RUBBER MFG. CO., LTD. 三五橡膠廠股份有限公司

No. 106, Section 2 Chang Mei Road, Hemei, Changhua County, Taiwan 台灣 彰化縣和美鎮彰美路二段106號 T 886.4.7361445-6 F 886.4.7365900 E global.trade@sanwu.com.tw www.sanwu.com.tw

