



**MEGAFLAT**



**MEGADYNE**

Introduction to Megaflat

**3**

Polyurethane flat belts

Product range

**4**

Rubber flat belts

Product range

**8**



## INTRODUCTION TO MEGAFLAT



MEGAFLAT belts are truly endless mandrel moulded without a single seam or splice. Special fabrics of Polyester, Polyamid, Aramide, Cotton yarn or Elastic yarn are manufactured in endless form on the most modern CNC knitting machines. The available coatings Polyurethane, Silicone and Natural Rubber are applied as an endless cover. This wide variety of basic materials and surface treatments guarantee the perfect belt for transmission and for conveying even at extreme speeds and in special environments.

### MAIN FEATURES

- High flexibility
- Small pulley diameters
- Dimensional accuracy
- High speed
- Energy efficient
- Low noise and vibration
- Low maintenance
- Good chemical and ozone resistance
- High friction surface
- Uniform elongation values

MEGAFLAT is always a belt made exactly to customer requirements in endless form.



### MAIN COMPONENTS OF MEGAFLAT BELTS

- **TENSILE REINFORCEMENT:**  
Special fabrics are available with:  
**Elastic yarn**, high elastic elongation from 4-10% for fixed shaft centre distances.  
**Polyamide**, medium elastic from 0,5-1,5% for fixed shaft centre distances.  
**Polyester**, low elastic elongation.  
**Cotton yarn**, low elongation and low coefficient of friction.  
**Aramide**, extremely low elongation and temperature resistance up to 280°.
- **COATINGS:**  
Endless covers are available  
**Foamed Polyurethane**, in colours yellow, grey, red and white, different hardness and thickness up to 10 mm, good coefficient of friction to paper  
**Neoprene Rubber**, black with hardness approx. 75 Shore A, high resistance to abrasion, high coefficient of friction, rough on transport side and smooth on the reverse side  
**Silicones**, in colours white, grey, red, blue, hardness approx. 30-35 ShA. High temperature resistant, FDA approved.





# POLYURETHANE FLAT BELTS

## PRODUCT RANGE

TYPE	P0	P102
		
Fabric	No fabric	Elastic fabric
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	No	Polyurethane/Silicone
Colour <sup>(1)</sup>	Yellow & Grey	Yellow & Grey
Antistatic	No	Possible
<b>Coefficient of friction (<math>\mu</math>)</b>		
• Coated side smooth	0,4	0,4
• Fabric side rough	-	0,2
<b>Breaking strength (N) per cm width in endless form</b>		
Breaking strength (N) per cm width in endless form	140	250
Pretension (N) recommended per cm width in endless form	-	10
<b>Elongation (%) at pretension recommended per cm</b>		
Elongation (%) at pretension recommended per cm	4 - 8	4
<b>Minimum recommended pulley diameter (mm)</b>		
Minimum recommended pulley diameter (mm)	8	25
<b>Size (mm) <sup>(2)</sup></b>		
• Length	210 - 2500	210 - 2500
• Width (length $\leq$ 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 550	6 - 600
• Width (length > 750 mm)	6 - 550	6 - 600
• Thickness	0,9	1,8 <sup>(3)</sup>
<b>Tolerances</b>		
• Length (%)	+/-2,0	+/-2,0
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05
<b>Working temperature (intermittent)</b>		
Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
<b>Applications</b>		
Applications	Suitable for fixed center distance drive system like copying machines. Highly elastic.	Suitable for fixed center distance drive systems like machinery for paper transport. Elastic.

# POLYURETHANE FLAT BELTS

## PRODUCT RANGE


TYPE	P108	P110
		
Fabric	Polyester/Cotton	Polyester
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	Polyurethane/Silicone	Polyurethane/Silicone
Colour <sup>(1)</sup>	Yellow & Grey	Yellow & Grey
Antistatic	Possible	Possible
<b>Coefficient of friction (<math>\mu</math>)</b>		
• Coated side smooth	0,4	0,4
• Fabric side rough	0,1	0,3
Breaking strength (N) per cm width in endless form	900	1250
Pretension (N) recommended per cm width in endless form	200	150
Elongation (%) at pretension recommended per cm	1,2	0,8
Minimum recommended pulley diameter (mm)	8	12
<b>Size (mm) <sup>(2)</sup></b>		
• Length	210 - 3850	210 - 3850
• Width (length <= 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 600	6 - 600
• Width (length > 750 mm)	6 - 600	6 - 600
• Thickness	0,8 <sup>(3)</sup>	1,0 <sup>(3)</sup>
<b>Tolerances</b>		
• Length (%)	+/-0,50	+/-0,50
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05
Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
Applications	Suitable for knife edge transport. Low coefficient of friction on textile side. Thin, highly flexible band.	Suitable for flexible drive and transport systems like grinding machines. Very good running performance. Universal applications.

<sup>(1)</sup>Additional colours on request - <sup>(2)</sup>Additional dimensions on request

<sup>(3)</sup>Increase of thickness by about 0,3/0,5 mm for belts coated both sides

# POLYURETHANE FLAT BELTS

## PRODUCT RANGE

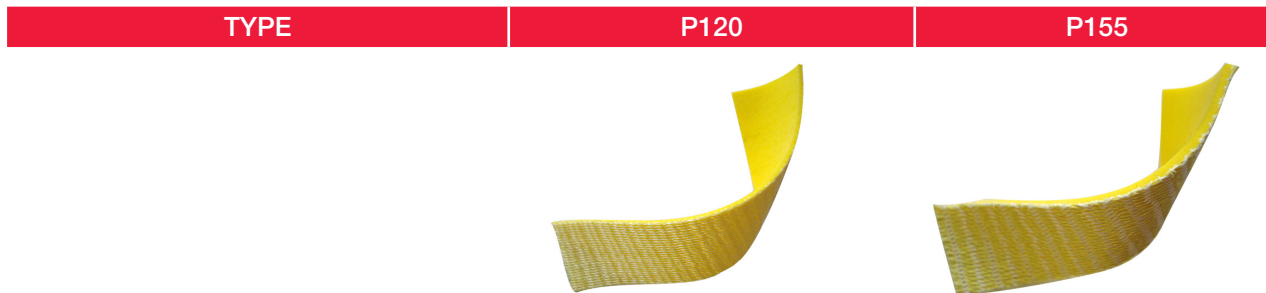

Fabric	Polyester	Aramid/ Polyester
Coating for drive or transport side	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)	Standard: 50 ShA (+/-7) Special: 30-40 ShA (soft foam), 60-75 ShA (hard)
Coating revers side	Polyurethane/Silicone	Polyurethane/Silicone
Colour <sup>(1)</sup>	Yellow & Grey	Yellow & Grey
Antistatic	Possible	Possible

Coefficient of friction ( $\mu$ )		
• Coated side smooth	0,4	0,4
• Fabric side rough	0,2	0,2

Breaking strength (N) per cm width in endless form	3500	6500
Pretension (N) recommended per cm width in endless form	300	350
Elongation (%) at pretension recommended per cm	0,8	0,5
Minimum recommended pulley diameter (mm)	20	30





Size (mm) <sup>(2)</sup>		
• Length	210 - 4300	210 - 4300
• Width (length $\leq$ 460 mm)	6 - 330	6 - 330
• Width (length > 460 - 600 mm)	6 - 330	6 - 330
• Width (length > 600 - 750 mm)	6 - 600	6 - 600
• Width (length > 750 mm)	6 - 600	6 - 600
• Thickness	1,5 <sup>(3)</sup>	2,0 <sup>(3)</sup>

Tolerances		
• Length (%)	+/-0,50	+/-1,0
• Width (mm)	+/-0,50	+/-0,50
• Thickness (mm)	+/-0,05	+/-0,05

Working temperature (intermittent)	-10°C / +60°C (+80)	-10°C / +60°C (+80)
Applications	Suitable for heavy drive conditions. Universal applications. Medium-duty drives.	Suitable for conveyor system. Extremely low elongation. Heavy-duty drives.

# POLYURETHANE FLAT BELTS

## PRODUCT RANGE


S108	S110	S120	S155
			
Polyester/Cotton	Polyester	Polyester	Aramid/Polyester
Silicone 30-35 ShA	Silicone 30-35 ShA	Silicone 30-35 ShA	Silicone 30-35 ShA
Polyurethane/Silicone	Polyurethane/Silicone	Polyurethane/Silicone	Polyurethane/Silicone
White & Grey	White & Grey	White & Grey	White & Grey
Possible	Possible	Possible	Possible
0,6	0,6	0,6	0,6
0,1	0,2	0,4	0,2
800	1000	3400	5900
180	125	350	400
0,8	0,8	0,8	0,5
8	12	20	25
210 - 3850	210 - 3850	210 - 4300	210 - 3800
6 - 330	6 - 330	6 - 330	6 - 330
6 - 330	6 - 330	6 - 330	6 - 330
6 - 600	6 - 600	6 - 600	6 - 600
6 - 600	6 - 600	6 - 600	6 - 600
0,8 <sup>(3)</sup>	1,0 <sup>(3)</sup>	1,5 <sup>(3)</sup>	2,0 <sup>(3)</sup>
+/-0,50	+/-0,50	+/-0,50	+/-1,0
+/-0,50	+/-0,50	+/-0,50	+/-0,50
+/-0,05	+/-0,05	+/-0,05	+/-0,05
-50°C / +120°C (+160)	-50°C / +150°C (+180)	-50°C / +150°C (+180)	-60°C / +280°C (+300)
Transport belt, heat and cold resistant. Knife edge transport. Food contact.	Transport belt, heat and cold resistant. Suitable for food transport.	Universal transport belt, also for drive applications.	Transport belt, high strength and high temperature extremes.

<sup>(1)</sup>Additional colours on request - <sup>(2)</sup>Additional dimensions on request

<sup>(3)</sup>Increase of thickness by about 0,3/0,5 mm for belts coated both sides

# RUBBER FLAT BELTS

## PRODUCT RANGE

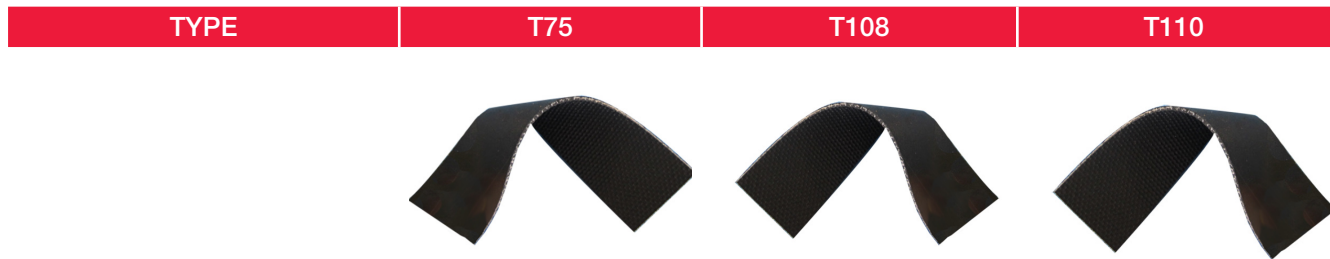

Fabric	Polyester	Polyester/Cotton	Polyester
Coating for drive or transport side	Neoprene rough	Neoprene rough	Neoprene rough
Coating revers side	Neoprene smooth	Neoprene smooth	Neoprene smooth
Colour <sup>(1)</sup>	Black	Black	Black
Antistatic	Yes	Yes	Yes

Coefficient of friction ( $\mu$ )			
• Coated side smooth	0,6	0,6	0,6
• Fabric side rough	0,5	0,5	0,5

Breaking strength (N) per cm width in endless form	1500	950	1750
Pretension (N) recommended per cm width in endless form	150	260	270
Elongation (%) at pretension recommended per cm	0,8	0,8	0,8
Minimum recommended pulley external diameter (mm)	6	10	15

Size (mm) <sup>(2)</sup>			
• Length	200 - 3850	200 - 3850	200 - 3850
• Width (length $\leq$ 470 mm)	6 - 330	6 - 330	6 - 300
• Width (length > 470 - 600 mm)	6 - 430	6 - 430	6 - 430
• Width (length > 600 - 750 mm)	6 - 430	6 - 430	6 - 430
• Width (length > 750 mm)	6 - 430	6 - 430	6 - 430
• Thickness	0,5	0,65	0,9

Tolerances			
• Length (%) *( $\leq$ 600 mm: $\pm$ 5mm)	$\pm$ 0,50	$\pm$ 0,50	$\pm$ 0,50
• Width (mm) for cut belt	$\pm$ 0,50	$\pm$ 0,50	$\pm$ 0,50
• Thickness (mm)	$\pm$ 0,15	$\pm$ 0,15	$\pm$ 0,15


Working temperature	-30°C / +110°C	-25°C / +100°C	-25°C / +100°C
Applications	Suitable for light-load transmission or conveying. Drivers for office equipments.	Particularly suitable for applications in office equipment. Very flexible.	Suitable for universal applications and textile machines. High belt running speed.



# RUBBER FLAT BELTS

## PRODUCT RANGE

T120	T150	T155	T200
------	------	------	------



Polyester	Polyester	Aramid/ Polyester	Polyester
Neoprene rough	Neoprene rough	Neoprene rough	Neoprene rough
Neoprene smooth	Neoprene smooth	Neoprene smooth	Neoprene smooth
Black	Black	Black	Black
Yes	Yes	Yes	Yes

0,6	0,6	0,6	0,6
0,5	0,5	0,5	0,5

3450	3000	8000	4000
350	300	500	400
0,8	0,7	0,3	0,8
20	15	30	20

470 - 3850	200 - 3850	470 - 3850	200 - 3850
6 - 330	6 - 330	6 - 330	6 - 330
6 - 430	6 - 430	6 - 430	6 - 430
6 - 430	6 - 430	6 - 430	6 - 430
6 - 430	6 - 430	6 - 430	6 - 430
1,4	0,9	1,6	1,1

+/-*0,5	+/-*0,5	+/-1,00	+/-*0,50
+/-0,50	+/-0,50	+/-0,50	+/-0,50
+/-0,15	+/-0,15	+/-0,15	+/-0,15

-25°C / +100°C	-25°C / +100°C	-25°C / +100°C	-30°C / +110°C
Suitable for medium-duty drives for wood or metal working.	Suitable for textile machinery. High belt running speed and medium torque drive	Suitable for low stretch demanding drive conditions. Heavy-duty drives.	Suitable for high torque, high speed drives such as machine tools.

<sup>(1)</sup>Additional colours on request - <sup>(2)</sup>Additional dimensions on request





The data and information contained in the present catalogue are up-to-dated to the date of the catalogue's printing. Megadyne Spa reserves the right to modify the specifications, performances and other information relating to the belts described in the present catalogue, at any time at its own discretion, without any prior notice. For updating refer to our web site [www.megadynegroup.com](http://www.megadynegroup.com).

Technical specifications, performances and other information provided in the present catalogue are indicative and do not bound Megadyne unless such specifications, performances or other information are expressly agreed in the agreement with the customer.

We also recommend to read carefully the following documents in our web site [www.megadynegroup.com](http://www.megadynegroup.com):

- Megadyne General Conditions of Sale (comprising the warranty)
- Theoretical Belt Life
- Drive Components: Storage, Installation, Maintenance and Troubleshooting Handbook - Belts standard use condition and temperature.

Copyright Notice: Megadyne Spa copyright. All rights reserved. Megadyne is and shall remain the owner of all rights on drawings, technical specifications and any other information contained in the present catalogue or otherwise communicated by Megadyne Spa to the customer. The customer shall not disclose such information to third parties or use such information for purposes different from the definition of the order to Megadyne Spa, unless upon prior written authorization of Megadyne.

**AUSTRALIA****Victoria**

Phone +61 (03) 9763 6701  
 au-ptsales@ammega.com

**BRASIL****Sorocaba**

Phone +55 15 2101 7700  
 Info.br@megadynegroup.com

**CANADA****Edmonton**

Phone +1 780 461 4400  
 Info.ca@megadynegroup.com

**Montreal**

Phone +1 514 695 1313  
 Info.ca@megadynegroup.com

**Toronto**

Phone +1 905 602 4400  
 Info.ca@megadynegroup.com

**CHINA****Beijing**

Phone +86 10 8150 7478  
 info.cn@megadynegroup.com

**Foshan**

Phone +86 757 8381 5530  
 info.cn@megadynegroup.com

**Ningbo\***

Phone +86 574 8650 5008  
 info.cn@megadynegroup.com

Phone +86 574 8833 4378  
 sales@challengept.com

**Qingdao\***

Phone +86 532 8658 0951  
 info.cn@megadynegroup.com

**Shanghai**

Phone +86 21 5447 1473  
 info.cn@megadynegroup.com

**Xi'an**

Phone +86 29 86358108  
 info.cn@megadynegroup.com

**COLOMBIA****Bogotá**

Phone + 57 1 390 4325  
 Info.co@megadynegroup.com

**Cartagena**

Phone + 57 5 693 2591  
 Info.co@megadynegroup.com

**Mosquera – Cundinamarca**

Phone +57 1 893 9890  
 info.co@megadynegroup.com

**CZECH REPUBLIC****Prague**

Phone +420 603 461 892  
 Info.cz@megadynegroup.com

**FRANCE****Paris**

Phone +33 1 6079 8200  
 info.fr@megadynegroup.com

**GERMANY****Borchen**

Phone +49 5251 8735 0  
 info.de@megadynegroup.com

**HUNGARY****Budapest**

Phone +36 23 428 628  
 info.hu@megadynegroup.com

**INDIA****Chennai\***

Phone +91 98841 81175  
 info.in@megadynegroup.com

**IRELAND****Dublin**

Phone +353 1 456 6311  
 ireland@challengept.com

**ISRAEL****Caesarea**

Phone +972 4 637 1485  
 info.il@megadynegroup.com

**ITALY****Turin\***

Phone +39 011 926 8052  
 info@megadynegroup.com

**Pescara\***

Phone +39 085 9700547  
 info.it@megadynegroup.com

**Venice**

Phone +39 041 929 367  
 info.it@megadynegroup.com

**JAPAN****Nagoya**

Phone +81 52 433 7400  
 info.jp@megadynegroup.com

**MEXICO****Mexico C.P.**

Phone +52 55 5587 3680  
 info.mx@megadynegroup.com

**PERU****Lima**

Phone + 51 1 713 0069  
 info.pe@megadynegroup.com

**POLAND****Bielsko Biala**

Phone + 48 32 447 7179  
 info.pl@megadynegroup.com

**Bydgoszcz\***

info.pl@megadynegroup.com

**SINGAPORE****Singapore**

Phone +65 62739767  
 Info.sg@megadynegroup.com

**SOUTH AFRICA****Johannesburg**

Phone + 27 (0) 12 661 1652  
 info.za@megadynegroup.com

Phone + 27 (0) 11 3976115  
 sasales@challengept.com

**Cape Town**

Phone +27 (0)21 9820772  
 info.za@megadynegroup.com

**SOUTH KOREA****Gyeonggi-do**

Phone +82 314483613-7  
 Info.kr@megadynegroup.com

**SPAIN****Vilanova\***

Phone +34 93 811 5450  
 info.es@megadynegroup.com

**SWEDEN****Kristianstad**

Phone +46 10 1309600  
 info.se@megadynegroup.com

**THAILAND****Bangkok**

Phone +66 2 902260413  
 info.th@megadynegroup.com

**TURKEY****Izmir**

Phone +90 232 877 07 00  
 info.tr@megadynegroup.com

**U.K.****Birmingham**

Phone +44 1384 215 021  
 info.uk@megadynegroup.com

**Wolverhampton**

Phone +44 (0) 1902 866116  
 uksales@challengept.com

**U.S.A****California**

Phone +1 323 265 8061  
 info.us@megadynegroup.com

**Florida**

Phone +1 813 241 4111  
 info.us@megadynegroup.com

**Georgia\***

info.us@megadynegroup.com

**Illinois**

Phone +1 630 752 0600  
 info.us@megadynegroup.com

**New Jersey Americas HQ**

Phone +1 973 227 4904  
 info.us@megadynegroup.com

**North Carolina\***

info.us@megadynegroup.com

**Oregon**

Phone +1 503 231 7224  
 info.us@megadynegroup.com

**Texas**

Phone +1 972 438 6992  
 info.us@megadynegroup.com

**\* Manufacturing locations****GENERAL CONTACT INFORMATION****MEGADYNE**

Via S. Lucia, 114  
 10075 Mathi (Torino)

Phone +39 011 926 8052  
 info@megadynegroup.com

ammega.com